

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/042886 A1

(51) International Patent Classification⁷: **E05B 47/06**,
63/04, 63/16

(21) International Application Number:
PCT/FI2004/000582

(22) International Filing Date: 5 October 2004 (05.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20031579 30 October 2003 (30.10.2003) FI

(71) Applicant (for all designated States except US): **ABLOY
OY** [FI/FI]; Wahlforssinkatu 20, FI-80100 Joensuu (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **RAATIKAINEN,
Juha** [FI/FI]; Miiilunpolttajantie 7, FI-80160 Joensuu (FI).
TIRKKONEN, Petri [FI/FI]; Ketsuntupa 7, FI-82200
Hammaslahti (FI).

(74) Agent: **AWEK INDUSTRIAL PATENTS LTD OY**;
P.O.Box 230 (Lautatarhankatu 6), FI-00101 Helsinki (FI).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **DOOR LOCK WITH CONTROLLABLE HANDLE OPERATION**

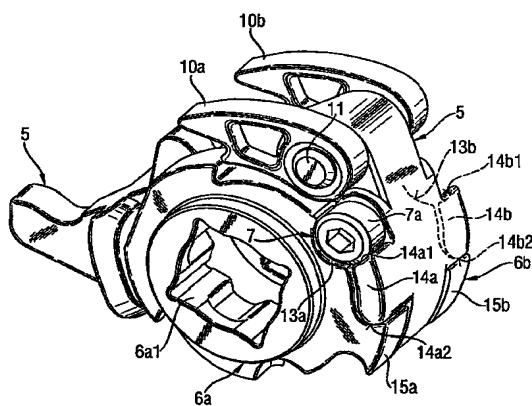

(57) Abstract: A door lock with controllable handle operation including a bolt (3), a follower (5) for moving the bolt and an operation axis (4), on both ends of which an actuator can be installed for operating the follower (5), whereby force transmission from either side of the lock to the follower (5) is established by means of movable coupling members (10a, 10b), which are controlled by a solenoid arrangement (8, 9) or the like, and in which the follower (5) is provided with two separate torsion units (6a, 6b) installed on the operation axis (4) on different sides of the follower (5) and turnably secured thereto, which units can be connected to force transmission with the follower (5) by utilising said coupling members (10a, 10b). The door lock comprises a selecting member (7) movable from one lock side to the other, which member retains the torsion unit (6a, 6b) selected in each case to be unturnable with respect to the follower (5), so that force transmission from the operation axis (4) to the follower (5) is connected on that particular side of the lock, and on the other side of the lock, force transmission from the operation axis (4) to the follower (5) can be selectively either connected or disconnected by means of said coupling members (10a, 10b) under the control of the solenoid arrangement (8, 9).

WO 2005/042886 A1